

# Provide international weighing solution



## LP7620 Floor Scale

No frame, low profile, self-aligning.  
 U-type beam, welded with special clamping apparatus.  
 Material: C.S. or S.S., Pan: smooth or slipproof plate.  
 C.S. Surface: powder coated or galvanized.  
 S.S. surface: polished & brushed.  
 Patent load introduction swivel foot.

Four load cells: alloy steel or stainless steel.  
 Normal capacity: 0.5/1/1.5/2/3/5/10t.  
 Normal size: 1.0×1.0/1.2×1.2/1.2×1.5/1.5×1.5/  
 1.5×2.0/2.0×2.0/2.0×3.0m.  
 Resolution: normally 3000e, optional 6000d or 15000d.



## Technical parameter


Accuracy: III  
 Operating temp: -10~+40°C  
 Power: AC220V 50Hz / DC 6V

## Specification

Model No.	Size (m×m)	Max. Cap (t)	Graduation (kg)	Height (mm)	N. W (kg)
LP7620-1/2/3-1010	1×1	1/2/3	0.2/0.5/1	95	80
LP7620-5-1010	1×1	5	1	95	90
LP7620-1/2/3-1212	1.2×1.2	1/2/3	0.2/0.5/1	95	105
LP7620-5-1212	1.2×1.2	5	1	95	115
LP7620-1/2/3-1215	1.2×1.5	1/2/3	0.2/0.5/1	95	125
LP7620-5-1215	1.2×1.5	5	1	95	140
LP7620-1/2/3-1515	1.5×1.5	1/2/3	0.2/0.5/1	95	150
LP7620-5-1515	1.5×1.5	5	1	95	170
LP7620-1/2/3-1520	1.5×2.0	1/2/3	0.2/0.5/1	95	195
LP7620-5-1520	1.5×2.0	5	1	95	225
LP7620-10-1520	1.5×2.0	10	2	125	300
LP7620-1/2/3-2020	2.0×2.0	1/2/3	0.2/0.5/1	95	250
LP7620-5-2020	2.0×2.0	5	1	95	295
LP7620-10-2020	2.0×2.0	10	2	125	410




Back



Junction Box



Stainless steel cover

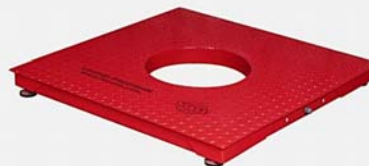

Reaction Scale



Lift s. s floor Scale